

ARCHI REACH 30

IP66 **WASH**

The fixture utilizes the latest ultra narrow beam technology, thus ensuring fixture output is at high intensity while consuming extremely low power,
The excellent optic design creates clean illumination and highly efficient light performance,
The optic design offers excellent glare control.



Dimmable



Easy Installation



Adjustable



Extreme Environments



IP66


SPECIFICATION

MODEL	▶ ARCHI REACH 30
OPERATING VOLTAGE	▶ 24V DC
POWER CONSUMPTION	▶ 3W, 6W
LED TYPE	▶ High Power LED
COLOR RANGE	▶ 2700K,3000K,4000K,5000K,Mono Color
CRI	▶ 80min, 90min
SYSTEM EFFICIENCY	▶ 46lm/W@3000K
FWHM	▶ 3°,7°
MATERIAL	▶ Aluminum + Tempered Glass
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ Φ30*130(H)mm
CABLE LENGTH	▶ 300mm
WATER PROOF	▶ IP66
CONTROL	▶ ON/OFF, DMX (Remote), 0-10V Dim
LIST	▶ CE

ORDER CODE	MODEL	SHAPE	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	ARCHI REACH 30	- ROUND	- 6	- 3000K	- 90	- 3	- 24	- DMX	

DIMENSIONS

Unit: mm

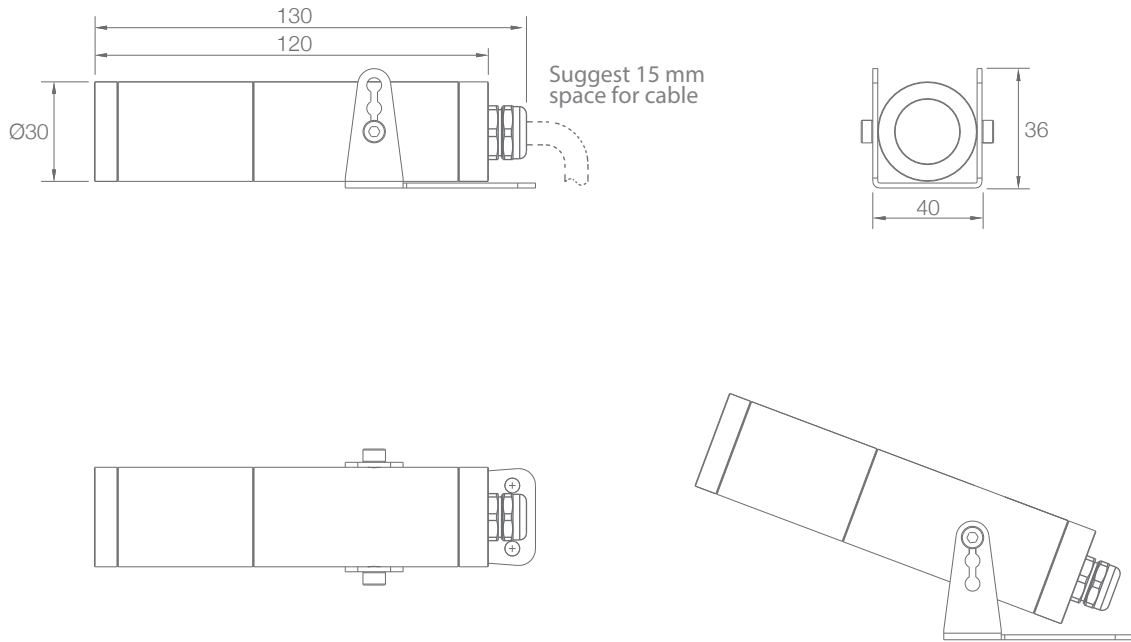

OPTIC SELECTION



3°

LED	Lumens	Watts	Efficacy
WHITE	278.16	6.00	46.36

CenterBeamLux	Illuminance at Distance
33238.97 lx	0.8m
8309.74 lx	1.7m
3693.22 lx	2.5m
2077.44 lx	3.3m
1329.56 lx	4.2m
923.30 lx	5.0m

■ Ver. Spread: 3.4° ■ Horiz. Spread: 3.6°



7°

LED	Lumens	Watts	Efficacy
WHITE	261.66	6.00	43.61

CenterBeamLux	Illuminance at Distance
7879.63 lx	0.8m
1969.91 lx	1.7m
875.51 lx	2.5m
492.48 lx	3.3m
315.19 lx	4.2m
218.88 lx	5.0m

■ Ver. Spread: 7.2° ■ Horiz. Spread: 7.2°

3000K