

- Designed to be compact with excellent thermal control,
- The thermal feedback by RDM insures the fixture is safe to use,
- The system is composed with double and triple units,
- The new flexibly mounted double and triple brackets rotate freely for a multitude of light directions,
- Proven to be ultra stable under extreme weather conditions.



RGBW



Easy Installation



Dimmable



RDM



Adjustable



IP67




SPECIFICATION

MODEL	▶ COMB
OPERATING CURRENT	▶ 550mA
POWER CONSUMPTION	▶ 40W MAX/unit
LED TYPE	▶ High Power LED
COLOR RANGE	▶ 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	▶ 85min
SYSTEM EFFICIENCY	▶ 77.87lm/W@3000K
FWHM	▶ 9°, 12°*41°, 16°, 20°
MATERIAL	▶ Aluminum + Tempered Glass
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ Φ114*82(H)mm, Φ114*152(H)mm (with bracket)
CABLE LENGTH	▶ 3000mm
WATER PROOF	▶ IP67
CONTROL	▶ ON/OFF, DMX/RDM (Remote)
LIST	▶ CE

ORDER CODE	MODEL	UNIT/LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	COMB	- 1	- 40	- 3000K	- 85	- 9	- 550C	- DMX	- TH

DIMENSIONS

Unit: mm

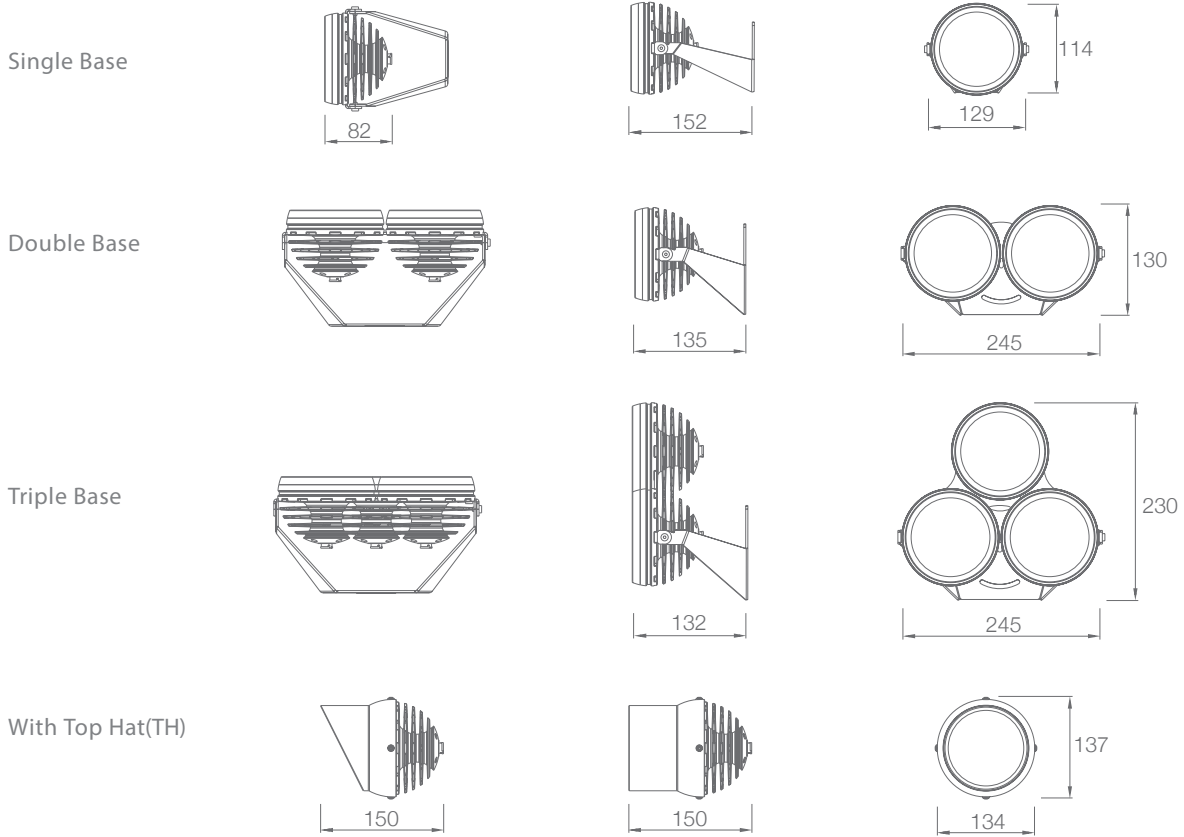

OPTIC SELECTION



9°

LED	Lumens	Watts	Efficacy
WHITE	1420.50	20.00	71.03

CenterBeamLux	Illuminance at Distance
2064.68 lx	5.0m
516.17 lx	10.0m
229.41 lx	15.0m
129.04 lx	20.0m
82.59 lx	25.0m
57.35 lx	30.0m

Ver. Spread: 8.2° Horiz. Spread: 8.3°



20°

LED	Lumens	Watts	Efficacy
WHITE	1557.40	20.00	77.87

CenterBeamLux	Illuminance at Distance
190.39 lx	5.0m
47.60 lx	10.0m
21.15 lx	15.0m
11.90 lx	20.0m
7.62 lx	25.0m
5.29 lx	30.0m

Ver. Spread: 22.2° Horiz. Spread: 21.9°

3000K