

ARCHI UPLIGHT 40

IP67 **WASH**

The main frame is composed of marine grade Stainless Steel 316,
Sophisticated and tiny design,
Narrow beam optic offers efficient spot effect.



RGB



Extreme
Environments



Dimmable



IP67



Easy
Installation




SPECIFICATION

MODEL	▶ ARCHI UPLIGHT 40
OPERATING VOLTAGE	▶ 24V DC
POWER CONSUMPTION	▶ 3W Max
LED TYPE	▶ High Power LED
COLOR RANGE	▶ 2700K,3000K,4000K,5000K,RGB,RGBW
CRI	▶ 80min
SYSTEM EFFICIENCY	▶ 72lm/W@3000K
FWHM	▶ 6°(Mono color), 15°(Mono color), 25°, 40°, 60°, 120°
MATERIAL	▶ Stainless Steel 316/Aluminum + Tempered Glass
PROTECTION	▶ IK08
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
DIMENSIONS	▶ Φ44*60(H)mm
CABLE LENGTH	▶ 500mm
WATER PROOF	▶ IP67
CONTROL	▶ ON/OFF, DMX, 0-10V Dim
LIST	▶ CE



ORDER CODE	MODEL	UNIT/LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC								
EXAMPLE	ARCHI UPLIGHT 40	-	N/A	-	3	-	3000K	-	80	-	15	-	24	-	ON/OFF	-	HC

DIMENSIONS


Unit: mm

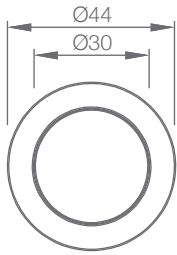


Type A

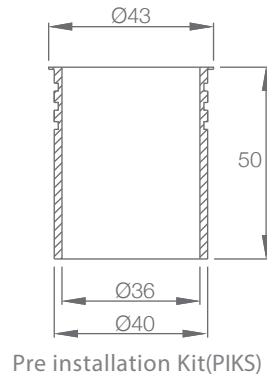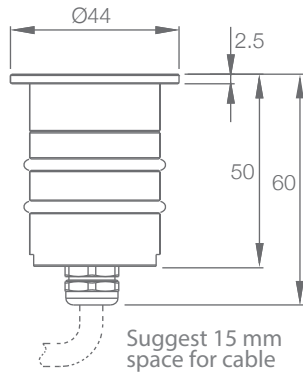



Pre installation Kit(PIKS)




Recessed Installation

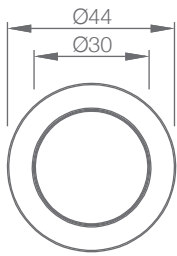

Type B

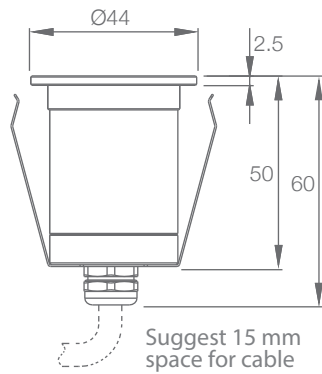

Bracket

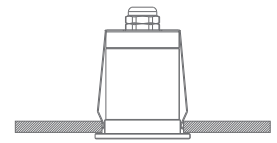

Ceiling installation



Honey Comb(HC)



Half Moon Glass



Full Moon Glass



Cut Out 40mm

OPTIC SELECTION



25°

LED	Lumens	Watts	Efficacy
WHITE	130.76	2.00	65.38

CenterBeamLux	Illuminance at Distance
823.95 lx	0.5m
205.83 lx	1.7m
91.52 lx	2.5m
51.45 lx	3.3m
32.95 lx	4.2m
22.88 lx	5.0m

■ Ver. Spread: 22.3° ■ Horiz. Spread: 23.1°



40°

LED	Lumens	Watts	Efficacy
WHITE	144.00	2.00	72.00

CenterBeamLux	Illuminance at Distance
556.00 lx	0.5m
138.90 lx	1.7m
61.72 lx	2.5m
34.72 lx	3.3m
22.23 lx	4.2m
15.45 lx	5.0m

■ Ver. Spread: 39.2° ■ Horiz. Spread: 38.4°

3000K