


# HP-LINEAR AC

IP66 **GRAZE**

The built in power supply makes for an easier installation,  
High lumen output is provided by a robust and efficient structure,  
Various beam angles are available for balancing efficiency and lighting effects,  
Connection can be extended up to 32 meters.








## SPECIFICATION

MODEL	▶ HP-LINEAR AC
OPERATING VOLTAGE	▶ AC 100–240V
POWER CONSUMPTION	▶ 16W/320mm, 64W/1220mm
LED TYPE	▶ High Power LED
COLOR RANGE	▶ 2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	▶ 90min, 80min
SYSTEM EFFICIENCY	▶ 75lm/W@3000K
FWHM	▶ Tilt 2.5@11°, 6°, 8°*15°, 8°*30°, 8°*50°, 20°*40°, 25°, 45°, 60°
MATERIAL	▶ Aluminum + Tempered Glass
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
CONNECTION	▶ Quick-Plug
DIMENSIONS	▶ 1220(L)*50(W)*74(H)mm, 320/620/920mm available
CABLE LENGTH	▶ 150mm
WATER PROOF	▶ IP66
CONTROL	▶ ON/OFF, DALI, DMX/RDM, TRIAC, 0–10V Dim
LIST	▶ CE, CCC


ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	HP-LINEAR AC	- 1220	- 64	- 3000K	- 90	- 6	- 220	- DMX	- LOUVER

**DIMENSIONS**

Unit: mm

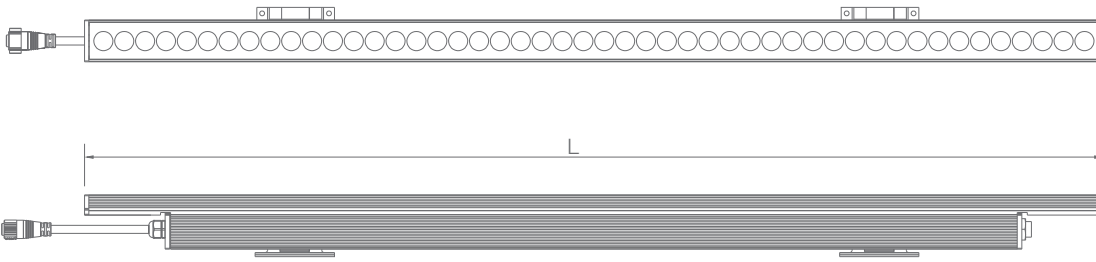

Louver



Barn Door(BD)



Leader Cable



Jumper Cable



**OPTIC SELECTION**



6°

LED	Lumens	Watts	Efficacy
WHITE	4607.88	64.00	72.00

CenterBeamLux	Illuminance at Distance
14218.96 lx	5.0m
3554.74 lx	10.0m
1579.88 lx	15.0m
888.69 lx	20.0m
568.76 lx	25.0m
394.97 lx	30.0m

Ver. Spread: 5.7° Horiz. Spread: 5.7°

3000K



8°X50°

LED	Lumens	Watts	Efficacy
WHITE	4800.00	64.00	75.00

CenterBeamLux	Illuminance at Distance
1527.61 lx	5.0m
381.90 lx	10.0m
169.73 lx	15.0m
95.48 lx	20.0m
61.10 lx	25.0m
42.43 lx	30.0m

Ver. Spread: 6.5° Horiz. Spread: 48.5°