


# HP-SLIM DC

IP66 **GRAZE**

A new cost competitive fixture designed for grazing applications, Superb optic design offers smooth mixture of colors and creates a variety of moods,

A fast installation is achieved with quick-plugs, Uniform lighting output by 2 steps or 3 steps bin selection is available upon request.

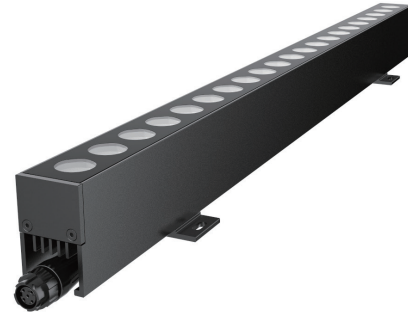

RGBW



Easy Installation




Dimmable



Extreme Environments



IP66




## SPECIFICATION

MODEL	› HP-SLIM DC
OPERATING VOLTAGE	› 24V DC, 48V DC
POWER CONSUMPTION	› 50W/1000mm
LED TYPE	› High Power LED
COLOR RANGE	› 2700K,3000K,4000K,5000K,6500K,RGB,RGBW
CRI	› 90min, 80min
SYSTEM EFFICIENCY	› 75lm/W@3000K
FWHM	› Tilt 2.5@11°, 8°, 8°*15°, 8°*30°, 8°*50°, 20°*40°, 25°, 45°
MATERIAL	› Aluminum + Tempered Glass
OPERATING TEMPERATURE	› -20°C ~ +55°C
STORAGE TEMPERATURE	› -25°C ~ +60°C
LIFE TIME	› 50,000 hours/L70 at 25°C
CONNECTION	› Quick-Plug
DIMENSIONS	› 1000(L)*35(W)*60(H)mm, 300/500/1200mm available 1000(L)*60(W)*60(H)mm(With Flat Bracket)
CABLE LENGTH	› 300mm
WATER PROOF	› IP66
CONTROL	› ON/OFF, DMX, 0-10V Dim
LIST	› CE


ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	HP-SLIM DC	- 1000	- 50	- 3000K	- 90	- 8	- 24	- DMX	- MLI

**DIMENSIONS**


Unit: mm

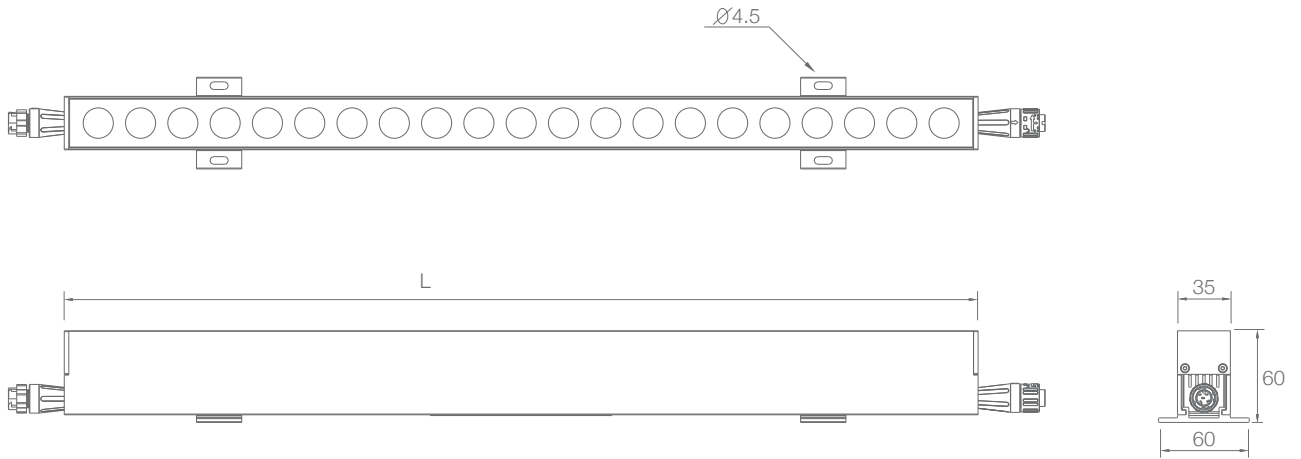


Louver




Micro Louver Inside (MLI)



Leader Cable

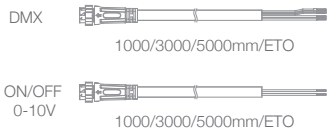

Jumper Cable

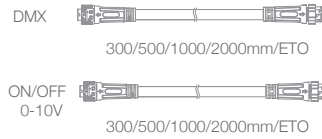

**OPTIC SELECTION**



8°

LED	Lumens	Watts	Efficacy
WHITE	3053.50	50.10	60.95

CenterBeamLux	Illuminance at Distance
4569.49 lx	5.0m
1142.37 lx	10.0m
507.72 lx	15.0m
285.59 lx	20.0m
182.78 lx	25.0m
126.93 lx	30.0m

■ Ver. Spread: 7.5° ■ Horiz. Spread: 7.5°



8°X50°

LED	Lumens	Watts	Efficacy
WHITE	3744.00	49.50	75.63

CenterBeamLux	Illuminance at Distance
1191.53 lx	5.0m
297.88 lx	10.0m
132.39 lx	15.0m
74.47 lx	20.0m
47.66 lx	25.0m
33.10 lx	30.0m

■ Ver. Spread: 6.5° ■ Horiz. Spread: 48.5°

3000K