



FLEX GRAZE PLUS

IP66 **GRAZE**

Flexible and compact design for outdoor curved space with high consistency of light output, Uniformity light output by 2 steps or 3 steps bin selection upon request.

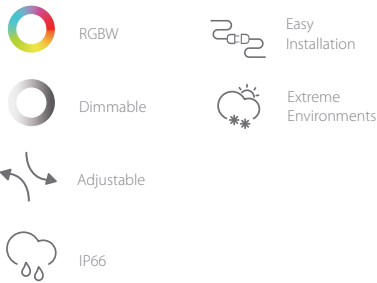





SPECIFICATION

MODEL	‣ FLEX GRAZE PLUS
OPERATING VOLTAGE	‣ 24V DC, 48V DC
POWER CONSUMPTION	‣ 6W/Unit, Max 6 Units Per Meter
LED TYPE	‣ High Power LED
COLOR RANGE	‣ 2700K,3000K,3500K,4000K,5000K,Tunable White,RGBW
CRI	‣ 90min, 80min
SYSTEM EFFICIENCY	‣ 72lm/W@3000K
FWHM	‣ Tilt 2.5@11°, 8°*30°, 8°*50°, 10°*120°, 20°*40°, 25°, 45°
MATERIAL	‣ Aluminum + Tempered Glass
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
CONNECTION	‣ Quick-Plug
DIMENSIONS	‣ 110(L)*35(W)*33(H)mm 110(L)*40(W)*56(H)mm (With Bracket)
CABLE LENGTH	‣ 300mm
WATER PROOF	‣ IP66
CONTROL	‣ ON/OFF, DMX, 0-10V Dim
LIST	‣ CE



ORDER CODE	MODEL	UNIT	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	FLEX GRAZE PLUS	- 6	- 36	- 3000K	- 80	- 2040	- 24	- ON/OFF	

DIMENSIONS



Unit: mm

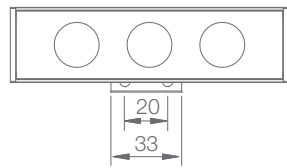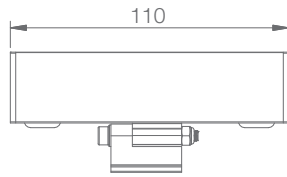

Leader Cable



Jumper Cable



OPTIC SELECTION



25°

LED	Lumens	Watts	Efficacy
WHITE	432.00	6.00	72.00

CenterBeamLux	Illuminance at Distance
1819.68 lx	0.8m
454.97 lx	1.7m
201.67 lx	2.5m
113.44 lx	3.3m
72.82 lx	4.2m
50.41 lx	5.0m

■ Ver. Spread: 24.5° ■ Horiz. Spread: 24.9°



20° X 40°

LED	Lumens	Watts	Efficacy
WHITE	390.00	6.00	65.00

CenterBeamLux	Illuminance at Distance
1484.31 lx	0.8m
371.08 lx	1.7m
164.92 lx	2.5m
97.22 lx	3.3m
59.37 lx	4.2m
41.23 lx	5.0m

■ Ver. Spread: 22.7° ■ Horiz. Spread: 42.1°

3000K