

ARCHI UPLIGHT 60

IP67 **WASH**

Aluminum housed, IP67, inground uplight ideal for outdoor and indoor applications,
Finished with tempered glass with black internal edge coating for glare control,
Wide range of optics for each installation application,



Dimmable



IP67



Easy Installation






SPECIFICATION

MODEL	▶ ARCHI UPLIGHT 60
OPERATING VOLTAGE	▶ 12V DC, 24V DC
POWER CONSUMPTION	▶ 6W Max
LED TYPE	▶ High Power LED, COB
COLOR RANGE	▶ 2700K,3000K,3500K,4000K,5000K
CRI	▶ 90min,80min
SYSTEM EFFICIENCY	▶ 62lm/W@3000K
FWHM	▶ 4°, 10°, 15°, 24°, 36°, 55°
MATERIAL	▶ Aluminum + Tempered Glass
PROTECTION	▶ IK10
OPERATING TEMPERATURE	▶ -20°C ~ +55°C
STORAGE TEMPERATURE	▶ -25°C ~ +60°C
LIFE TIME	▶ 50,000 hours/L70 at 25°C
DIMENSIONS	▶ Φ65*70(H)mm
CABLE LENGTH	▶ 500mm
WATER PROOF	▶ IP67
CONTROL	▶ ON/OFF, DMX, 0-10V Dim, DALI
LIST	▶ CE


ORDER CODE	MODEL	UNIT/LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC					
EXAMPLE	ARCHI UPLIGHT 60	-	N/A	-	6	-	3000K-90	-	15	-	24	-	ON/OFF-	HC

DIMENSIONS


Unit: mm

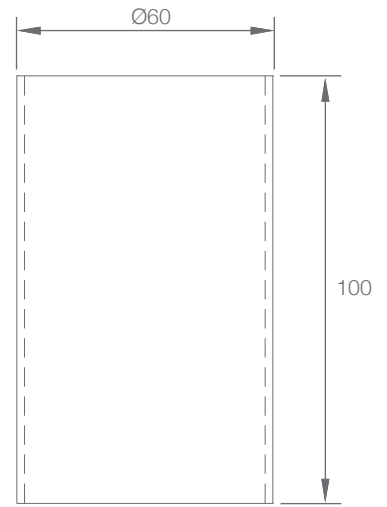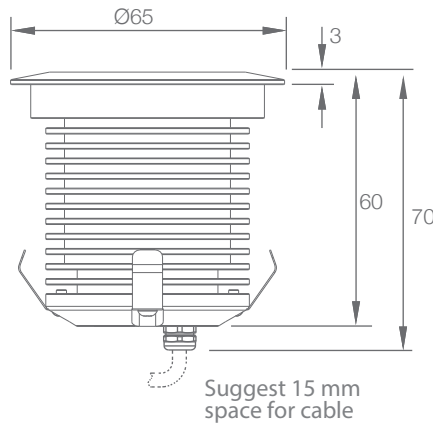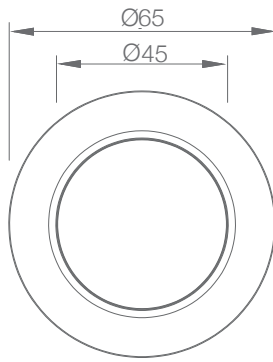


Pre installation Kit(PIKS)



Honey Comb(HC)



Half Moon Glass



Full Moon Glass



Cut Out 60mm

OPTIC SELECTION



10°

LED	Lumens	Watts	Efficacy
WHITE	336.00	6.00	56.00

CenterBeamLux	Illuminance at Distance
5881.50 lx	0.5m
1740.24 lx	1.7m
653.25 lx	2.5m
367.50 lx	3.3m
234.75 lx	4.2m
162.72 lx	5.0m

Ver. Spread: 10.4° Horiz. Spread: 10.7°



36°

LED	Lumens	Watts	Efficacy
WHITE	374.76	6.00	62.46

CenterBeamLux	Illuminance at Distance
1609.03 lx	0.5m
382.61 lx	1.7m
170.48 lx	2.5m
95.85 lx	3.3m
60.49 lx	4.2m
43.21 lx	5.0m

Ver. Spread: 36.5° Horiz. Spread: 35.4°

3000K