

FLEX MILKY SLIM TOP BENDED

IP67 **STRIP**

- Ultra flexible body designed for any curve or shape,
- The high quality diffuser creates smooth light for direct view with high CRI>90,
- Various length versions are available upon request,
- The system provides seamless continuous connection for lighting.



RGBW



Diffused




Dimmable



IP67




Easy Installation




SPECIFICATION

MODEL	‣ FLEX MILKY SLIM TOP BENDED
OPERATING VOLTAGE	‣ 24V DC
POWER CONSUMPTION	‣ 6W/meter, 9.6W/meter, 12W/meter
LED TYPE	‣ SMD
COLOR RANGE	‣ 2400K,2700K,3000K,4000K,5000K,Tunable White,RGB,RGBW
CRI	‣ 90min, 80min
SYSTEM EFFICIENCY	‣ 63lm/W@3000K
FWHM	‣ 120°
MATERIAL	‣ SILICONE
OPERATING TEMPERATURE	‣ -20°C ~ +55°C
STORAGE TEMPERATURE	‣ -25°C ~ +60°C
LIFE TIME	‣ 50,000 hours/L70 at 25°C
CONNECTION	‣ Quick-Plug
DIMENSIONS	‣ 1000(L)*16.5(W)*16.5(H)mm, Max 5meters, ETO length available
CABLE LENGTH	‣ 600mm
WATER PROOF	‣ IP67
CONTROL	‣ ON/OFF, DMX (Remote), 0-10V Dim
LIST	‣ CE


ORDER CODE	MODEL	LENGTH	POWER	CCT	CRI	OPTICS	VOLTAGE	CONTROL	ACC
EXAMPLE	FLEX MILKY SLIM TOP BENDED	- 1000	- 9.6	- 3000K	- 90	- 120	- 24	- ON/OFF	

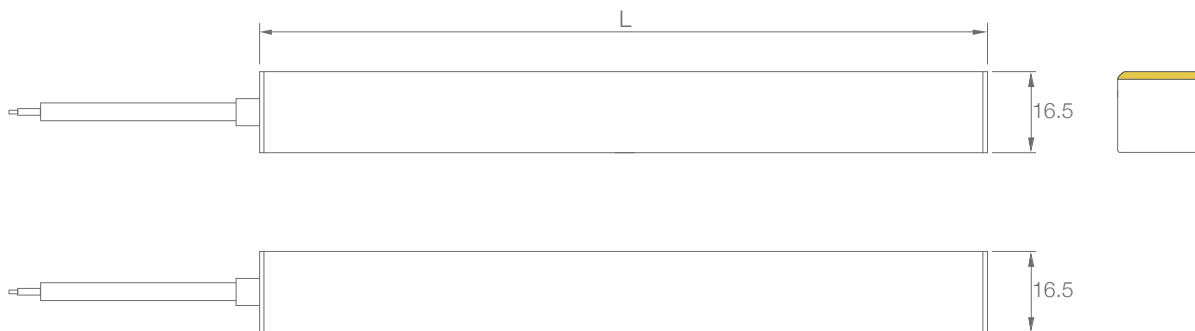

Cable From Side




Cable From Bottom




Cable From End





Mounting Track



Mounting Clip



Flex Mounting Track(SSL)



R ≥ 60mm

OPTIC SELECTION



120°

LED	Lumens	Watts	Efficacy
WHITE	336.76	5.50	63.14

CenterBeamLux	Illuminance at Distance
669.25 lx	0.3m
167.39 lx	0.7m
74.39 lx	1.0m
38.88 lx	1.3m
26.56 lx	1.7m
18.58 lx	2.0m

■ Ver. Spread: 125.4° ■ Horiz. Spread: 162.7°



120°

LED	Lumens	Watts	Efficacy
WHITE	595.00	9.60	61.97

CenterBeamLux	Illuminance at Distance
1142.31 lx	0.3m
285.56 lx	0.7m
126.24 lx	1.0m
71.18 lx	1.3m
45.66 lx	1.7m
31.71 lx	2.0m

■ Ver. Spread: 128.0° ■ Horiz. Spread: 162.5°

3000K